
NENUTEC®

INNOVATIVE MEMBER OF SWISSTEC

NVCB 7000 characterized ball valves

2-way & 3-way

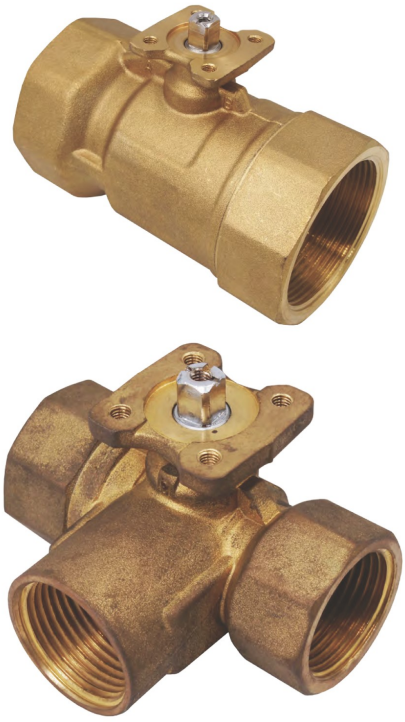

The appearance of the product may differ from the illustration. Technical specifications are subject to change.

NVCB 7000 SERIES

NVCB characterised disc ball valve is mainly use in the HVAC system to regulate the flow of water and steam in response to the demand of a controller.

- Complete range from DN 15 to DN 50 DN 15 to DN 50.
- Way, 3 way mixing / diverting
- Forged brass body
- Low leakage factor of up to 0.01% of Kvs
- High close-off pressure actuator satisfies demanding requirements of high-rise buildings and high pressure pumping systems
- PN 20 system operating pressure
- Equal percentage flow characteristic

TECHNICAL SPECIFICATION

Valve Body Pressure Rating	2000 kPa (PN20) meets requirements of ANSI B16.15, Class 250		
Rated fluid / ambient temperature limits	5 to 95°C water at an ambient temperature of 40°C		
Shipping & storage temperature limits	-40 to 70°C		
Nominal diameter	See Table 1: VALVE ORDERING CODES		
Media	Chilled, hot water, up to 50% glycol solutions and 15% (103 kPa) saturated steam		
Seat Leakage	0.01% of KVs		
Pipe connections	BSP or NPT		
Maximum close off pressure	See Table 2: MAXIMUM CLOSE-OFF PRESSURE [kPa] WITH ACTUATOR		
Body material	Brass trim	Body	Forged brass
		Stem	Brass
		Seat	EPDM
		Seal	HNVR double O-ring
Flow characteristics	2-way	equal percentage	
	3-way	Equal percentage of inline port A & linear for port B bypass	


NENUTEC®

INNOVATIVE MEMBER OF SWISTEC

NVCB 7000 characterized ball valves

2-way & 3-way

TABLE 1: VALVE ORDERING CODES

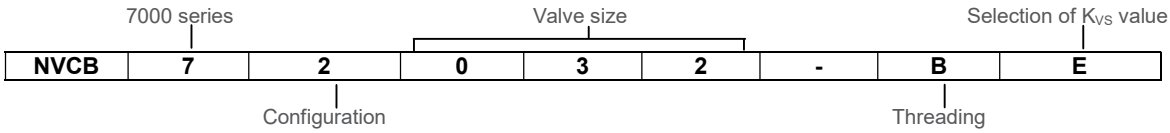

VALVE BODY TYPE	**NVCB 7 = NVCB 7000 Series Characterised Ball Valve**
CONFIGURATION	2 = 2 - Way 3 = 3 - Way
VALVE SIZE	015 = DN15
	020 = DN20
	025 = DN25 032 = DN32
	040 = DN40
	050 = DN50
PIPE THREAD	B = BSP N = NPT
FLOW CHARACTERISTIC (FOR 3-WAY VALVE ONLY)	M = Mixing (2 in, 1 out)
	D = Diverting (1 in, 2 out)

KVs Selection

DN / K_{VS}	15		20		25		32		40		50	
	2-way	3-way	2-way	3-way	2-way	3-way	2-way	3-way	2-way	3-way	2-way	3-way
C	1.0	1.0	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
C1	1.6	1.6	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
D	2.5	2.5	4.0	4.0	6.3	6.3	10.0	10.0	16.0	16.0	25.0	25.0
E	4.0	4.0	6.3	6.3	10.0	10.0	16.0	16.0	25.0	25.0	40.0	40.0
F (FULL PORT)	6.3	6.3	10.1	10.1	16.0	16.0	25.0	25.0	40.0	40.0	63.0	63.0

TABLE 2: MAXIMUM CLOSE-OFF PRESSURE [kPa] WITH ACTUATOR

MAXIMUM CLOSE-OFF PRESSURE [kPa]							
MODEL	**TORQUE (Nm)**	**DN15**	**DN20**	**DN25**	**DN32**	**DN40**	**DN50**
NAB...- 05	5	1000	1000	1000	1000	690	400
NEB...- 05	5	1000	1000	1000	1000	690	400
NAB...- 10	10	1400	1400	1400	1400	1000	1000
NEB...- 10	10	1400	1400	1400	1400	1000	1000


NENUTEC®

INNOVATIVE MEMBER OF SWISTEC

NVCB 7000 characterized ball valves

2-way & 3-way

PIPING DIAGRAMS

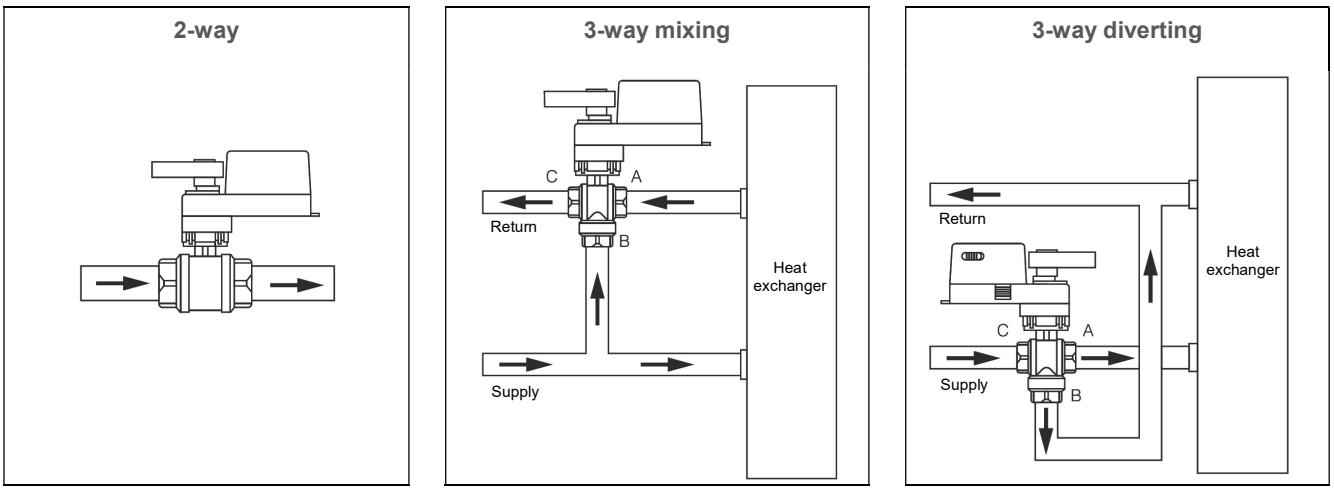

Mixing application:
Fluid enters through two inlets (A & B) and exits through one outlet (C).


Diverting application:
Fluid enters through one inlet (C) and exits through two outlets (A & C).

REMARK

3-way valve assemblies are shipped as standard with ball ports labeled as A, B and C accordingly. All 3-way ball valves are shipped 0° counterclockwise. For application requiring a different flow pattern, please consult your NENUTEC representative.

DIMENSIONS OF VALVE BODY [mm]


DIMENSIONS	DN [mm]	A	B	H	L	S	D
2 & 3-way:	15	105	65	158	60	39	31
	20	105	65	158	67	44	32
	25	105	65	160	89	47	47
	32	140	85	190	99	53	49
	40	140	85	200	106	57	52
	50	140	85	210	123	62	69

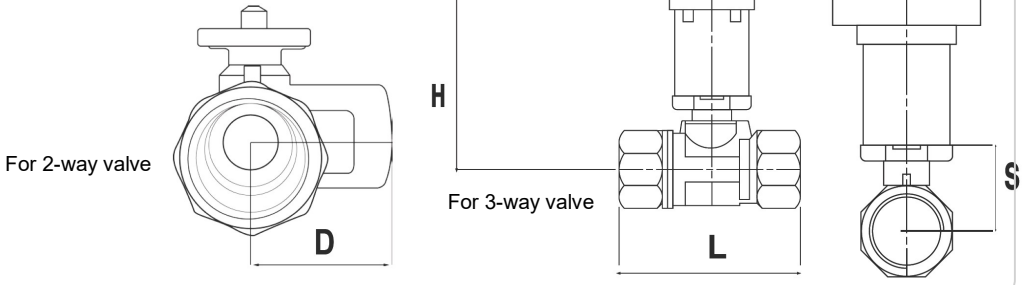


NVCB 7000 characterized ball valves

2-way & 3-way

INSTALLATION INSTRUCTIONS



1. Items shown in photo are ready for assembling.




2. Place the the shaft into the actuator.



3. Tighten the screw from the actuator to secure the shaft.



4. Attach the bracket to the valve body and secure with all screws provided.



5. Position the valve body and latch onto the neck of the actuator in the correct direction



6. The assembled finished product should look like this and it is ready to use.

APPLICATION OVERVIEW

The NVCB 7000 series feature are available in 2-way and 3-way configurations with threaded NPT or BSP connections. The valve can be ordered with NENUTEC ball valve actuator NAB... and NTC... / NPC... controller for a complete HVAC solution.

IMPORTANT REMARKS

This product includes electrical and electronic components and may not be disposed as household waste. Please consider the local valid legislation.

24 $V_{AC/DC}$:	Connect via safety isolating transformer.
230 V_{AC}:	To isolate from the main power supply, the system must incorporate a device which disconnects the phase conductor (with at least a 3mm contact gap.)

Consult NENUTEC representatives for specific requirements and material selections for your intended application.

The entire content of this technical datasheet is protected by copyright.
All rights are reserved ©.

The performance specifications are nominal and conform to acceptable industry standards. Nenutec shall not be liable for damages resulting from misapplication or misuse of its products.

CUSTOMISED VERSION

NENUTEC offers you actuators in customised versions, e.g. with your own brand name, with colour-coordinated applications and with your particular demand on request.

For further information please contact us or our local representative.

Nenutec Polska

00-236 Warszawa
ul. Świętojerska 5/7
tel.: +48-(0)-504-050225
nenutec@nenutec.pl