VM... Válvulas de Mariposa / Butterfly Valves





APLICACIONES

Las válvulas de mariposa VM han sido diseñadas para su uso en instalaciones LPW (agua a baja presión) de calefacción y aire acondicionado.

PRINCIPALES PROPIEDADES

- Dimensiones y peso reducido
- Montaje y desmontaje rápido
- Bajos costes de instalación y mantenimiento
- Reducida pérdida de carga
- Fácil maniobrabilidad
- Regulación automática
- Estanqueidad total

MATERIALES

Cuerpo:	Aluminio*
Asiento:	E.P.D.M.
Eje:	X30Cr13 (AISI - 420)
Disco:	Fundición Nodular (GJS 500)**

* Opcionalmente Fundición Nodular
** Opcionalmente Acero Inoxidable

APPLICATIONS

The VM series of butterfly valves is designed for use in LPW (low pressure water) heating and air conditioning systems.

MAIN FEATURES

- *Low weight and dimensions*
- *Easy disassembly and assembly*
- *Low cost of maintenance*
- *Low pressure drop*
- *Easy to operate*
- *Automatic regulating*
- *Bubble tinht shat-off*

MATERIALS

Body:	*Aluminium**
Seat:	*E.P.D.M.*
Shaft:	*X30Cr13 (AISI - 420)*
Disc:	*Nodular Iron (GJS 500)***

** Opcional Nodular Iron*
*** Opcional Stainless Steel*


NENUTEC®

TECHNICAL DATA


Valve	Kv (m^3/h)	Diff. Press. (bar)	Connection (PN)	Water temp. (°C)	Actuator
VM 40	50	12	10/16	-15 ... 90	NACA / NECA
VM 50	85	10	10/16	-15 ... 90	NACA / NECA
VM 65	215	8	10/16	-15 ... 90	NACA / NECA
VM 80	420	8	10/16	-15 ... 90	NACA / NECA
VM 100	800	6	10/16	-15 ... 90	NACA / NECA
VM 125	1.010	4	10/16	-15 ... 90	NACA / NECA


DIMENSIONS

DN	A	B	C
VM 32	151	217	307
VM 40	151	217	307
VM 50	166	239	329
VM 65	170	258	348
VM 80	172	260	350
VM 120	187	295	385
VM 150	205	324	414

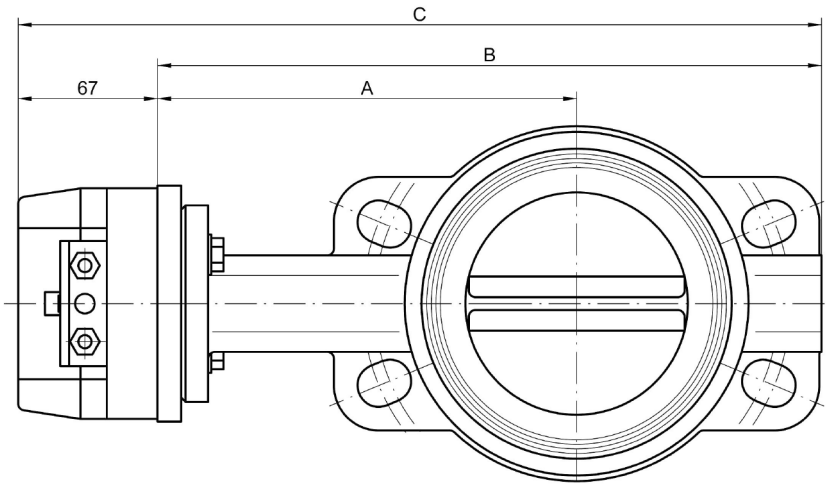



NACA20 - STANDAR ACTUATOR

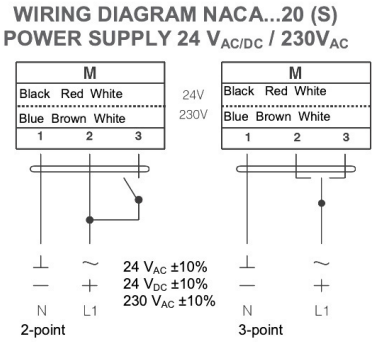

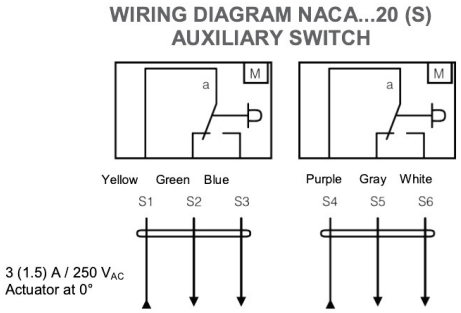

NECA20 - ELECTRONIC RETURN ACTUATOR



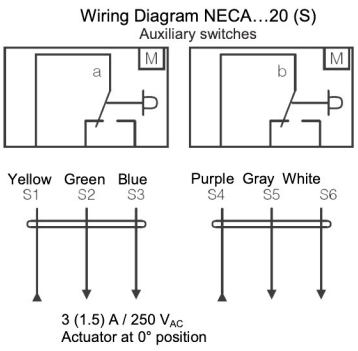

Further information will be found in the NACA20 / NECA20 datasheets

NENUTEC®